

HealthyAire® Spec Humidifier Models DH70 & DH95 Sheet

Specifications		
	DH70	DH95
Capacity	70 Pints Per 24 Hours @ 80° / DBT / 60% RH	95 Pints Per 24 Hours @ 80° / DBT / 60% RH
Power Supply	110-120VAC, 6.7 FLA amps, 60Hz, Grounded	110-120VAC, 9.6 FLA amps, 60Hz, Grounded
Compressor	Rotary; 733 Watts, RLA 7, LRA N/A	Rotary; 994 Watts, RLA 9.6, LRA 58.4
Fan Motor	90 Watts	115 Watts
Air Flow CFM	280 CFM Without External Ducting	375 CFM Without External Ducting
Inlet Air Operating Cond.	50° - 90°	50° - 90°
Filter	MERV 11 Pleated 11 3/4" x 11 3/4" x 2"	MERV 11 Pleated 13 3/8" x 13 3/8" x 2"
Cabinet Insulation	Foil-faced fiberglass 1/2" thick & closed cell foam	Foil-faced fiberglass 1/2" thick & closed cell foam
Duct Connections	8" Diameter (Inlet & Outlet)	10" Diameter (Inlet & Outlet)
Drain Pan	Plastic	Plastic
Condensate Drain	3/4" NPT	3/4" NPT
Weight	65 Lbs.	73 Lbs.
Dimensions	13" H x 13" W x 27 1/4" L	14 1/2" H x 14 1/2" W x 29 1/4" L
Warranty	Five Years - Compressor One Year - All Parts	Five Years - Compressor One Year - All Parts



Tested to ANSI/UL STD 474, and to Can/CSA Std C22.2 No. 92-197 and applicable sections of ANSI/UL STD 1995.

Due to ongoing development these specifications be updated at any time. Please consult the factory for the latest version.

General Filters, Inc.
43800 Grand River Avenue
Novi, MI 48375
Toll Free: (866) 476-5101


www.generalaire.com



DH 70 & DH 95

Whole House Dehumidifier System

Dimension	DH70	DH95
A	27 1/4	29 1/4
B	13	14 1/4
C	23 1/4	25 1/4
D	13	14 1/4
E	13 3/4	15 1/4
F	12 3/4	14 1/4
G	8" Round	10" Round
H	8" Round	10" Round

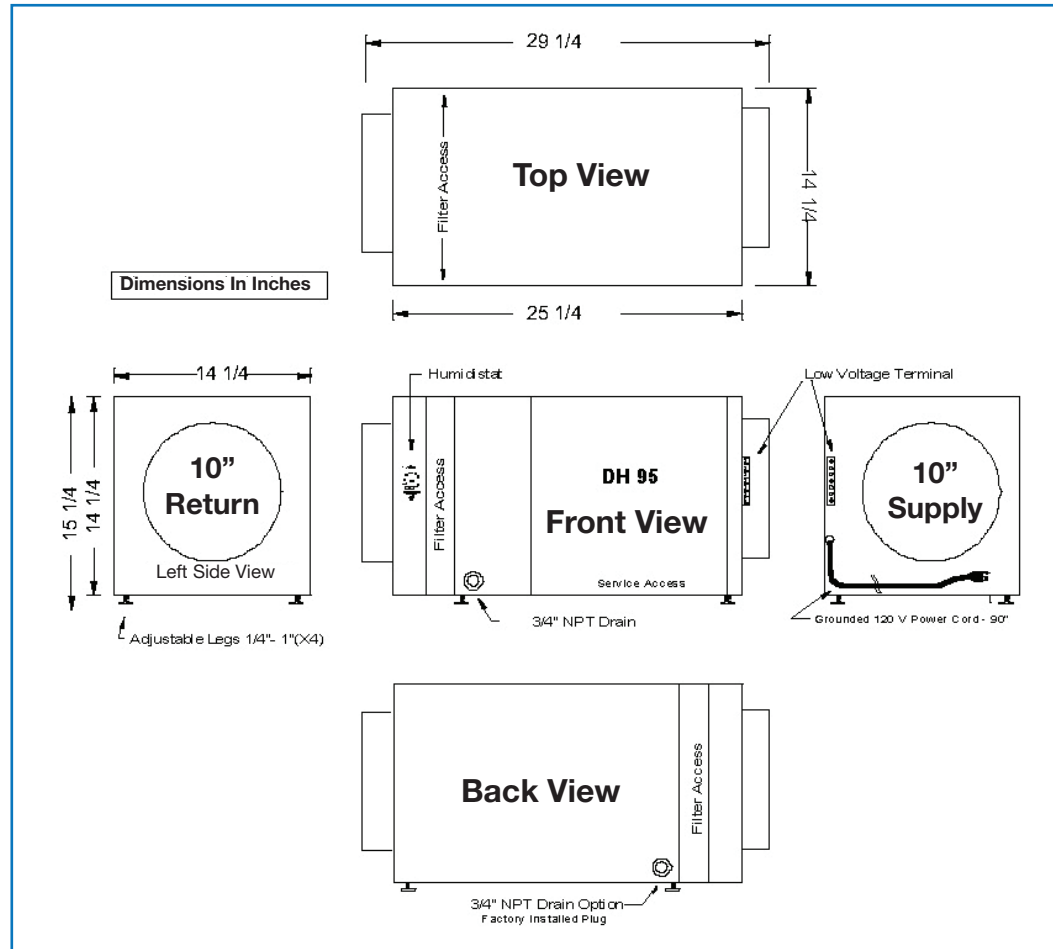

Maintenance

Maintenance of your new GeneralAire® Dehumidifier is minimal.

- Replace the MERV 11 pleated filter once every 6 months.
- If deemed necessary: Flush the unit with water to ensure the drain is clear.

Breathe Healthier

Due to ongoing development these specifications be updated at any time. Please consult the factory for the latest version.